


Country of Origin : China

Operating Temperature : 0 ~ 45° C

Dimension : 72 x 42.5 x 26 mm

Approvals / Marks : UL, c-UL, TÜV, CE, CCC, PSE
EN60601 Medical

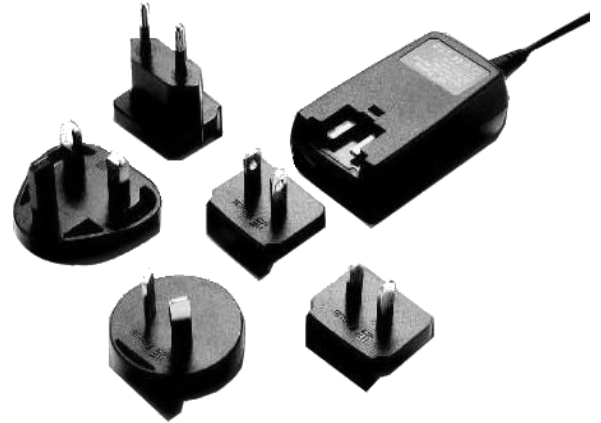

Features:

Wall-mount Adapter with Exchangeable Plug

Wide input voltage range 100~240 VAC

Output voltage available from 3 ~ 24 VDC

Output connector: standard: 5.5 x 2.1 x 9.5mm or customer requirement

Low standby power 0.3W max.

1 year warranty


Specification:

	MODEL	Voltage	Current	Tolerance	Ripple & Noise	Max. Power
OUTPUT	DUE15WCP-3.0	3 VDC	0.10 ~ 2.00 A	5%	100mV	6W
	DUE15WCP-4.0	4 VDC	0.10 ~ 2.00 A	5%	100mV	8W
	DUE15WCP-5.0	5 VDC	0.10 ~ 2.00 A	5%	100mV	10W
	DUE15WCP-6.0	6 VDC	0.10 ~ 2.00 A	5%	100mV	12W
	DUE15WCP-7.0	7 VDC	0.10 ~ 1.70 A	5%	100mV	11.9W
	DUE15WCP-8.0	8 VDC	0.10 ~ 1.50 A	5%	100mV	12W
	DUE15WCP-9.0	9 VDC	0.10 ~ 1.30 A	5%	100mV	11.7W
	DUE15WCP-10.0	10 VDC	0.10 ~ 1.25 A	5%	100mV	12.5W
	DUE15WCP-12.0	12 VDC	0.10 ~ 1.25 A	5%	150mV	15W
	DUE15WCP-15.0	15 VDC	0.10 ~ 0.90 A	5%	150mV	13.5W
	DUE15WCP-16.0	16 VDC	0.10 ~ 0.85 A	5%	200mV	13.6W
	DUE15WCP-18.0	18 VDC	0.10 ~ 0.80 A	5%	200mV	14.4W
	DUE15WCP-24.0	24 VDC	0.10 ~ 0.63 A	5%	200mV	15.12W
		Efficiency (typ)	60% @ full load			

INPUT	Voltage	100 ~ 240VAC
	Frequency	50 ~ 60 Hz
	Current	0.4A @ 90VAC input
	Inrush Current	40A @ 220VAC input
	Leakage Current	< 0.1mA @ 240VAC input
PROTECTION	Over Current	> 5A
	Short Circuit	Output protected, auto recovery after short condition has been removed
OTHERS	Standby Power	0.3W max.
	Cooling	Free air convection
	Withstand Voltage	I/P-O/P: 3000VAC or 4242VDC / 1 minute
	Insulation Resist.	I/P-O/P, I/P-FG : 500VDC / 10M Ohm
Environment	Temperature	Operating: 0 ~ 45°C / Storage: -20 ~ 80°C
	Humidity	Operating: 10% ~ 90% RH (non condensing) / Storage: 5% ~ 90% RH (non condensing)
Connection	Input	Plugs: EU (17g), UK (20g), US (10g), AUS (15g), China (10g), Japan (10g) (exchangeable)
	Output	Plug: standard: 2.1x5.5x9.5mm, center '+' or customer requirement // Cable: 180cm
M.T.B.F.	100 K hours (according to MIL-HDBK-217F in 25°C environment)	
SAFETY	Approved: UL 60950 / UL 2601 / TÜV 60950 / TÜV EN60601 / CSA 60950 / CSA601	
EMC	CISPR22 1997 Class B / EN55022 Class B	
WEIGHT	N.W.: 0.122 kg without AC-plug	



UK



EU



China



USA



Australia

